

Tact Switches

Features

- Compact design
- Advanced switch technology
- Economical
- Positive tactile action
- Tamper proof application
- Flow solder wash away cleaning
- High quality
- Surface mount versions available
- Can be supplied taped for auto insertion

Specification


Rating load:	50mA/12V DC
Contact resistance:	100mΩ
Insulation resistance:	>25MΩ
Life:	100 000 operations min
Operating force:	160±50g
Return force:	0.8N
Temperature range:	-20°C to +70°C
Contact material:	Silver plated nickel
Bounce time:	<2msec
Travel:	0.25±0.1m/m

3.5x6mm Tact Switches




CB00.5 Series

Type No.	Button height (H)
CB00.5-1F	4.3mm
BB00.5-5H	5.0mm

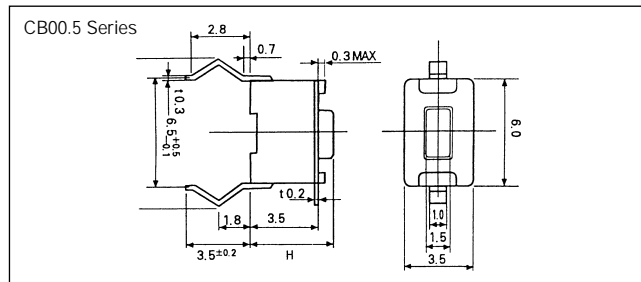


CB00.5-1FR Series

Type No.	Button height (H)
CB00.5-1FR	4.3mm

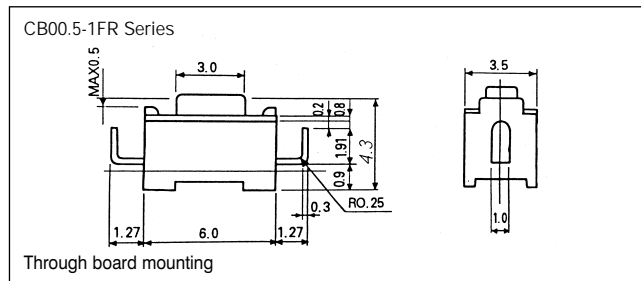

CB00.5-1S Series

Type No.	Button height (H)
CB00.5-1S	4.3mm
CB00.5-5HS	5.0mm

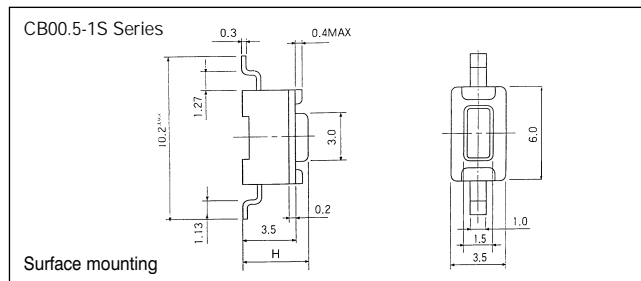

PCB
TERMINAL
BLOCKS

FUSES &
FUSE-
HOLDERS

BATTERIES

LED'S

MINIATURE
SWITCHES

INTERFACE
MODULES &
SUPPORTS

ENCLOSURES

IC & PLCC
SOCKETS

RELAY
BASES

CONTROL
PRODUCTS