
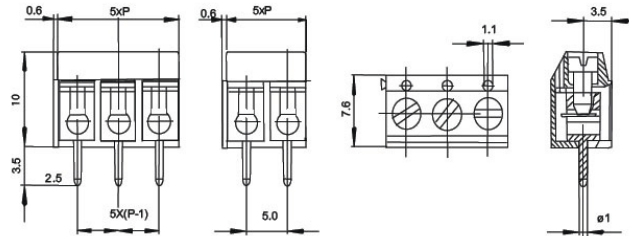


# PCB Terminal Blocks

PCB Terminal Block 5 mm Pitch

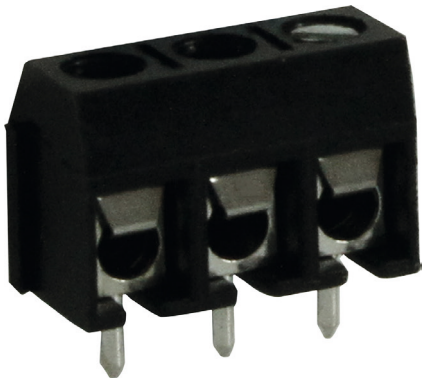

## FEATURES:

Low profile

2-12 pole interlocking

Wire protector terminals

Withstand Voltage - AC2000V/1min

Guided pin alignment

Recommended PCB hole size  $\varnothing 1.2$  mm

UL approved

## SPECIFICATION:

Rating to EN

16 A @ 250 V

Rating to UL

16 A @ 250 V

Pitch

5 mm

Connection cross-section

0.3-2 mm<sup>2</sup> (22-14 AWG)

Material

PA 66, UL94-V0

Colour

black

Temperature range

-33...+120 °C

## PRODUCT RANGE:

Art. no.	Pole no.	Length
RND 205-00012	2	10 mm
RND 205-00013	3	15 mm
RND 205-00014	4	20 mm
RND 205-00015	5	25 mm
RND 205-00016	6	30 mm
RND 205-00017	7	35 mm
RND 205-00018	8	40 mm
RND 205-00019	9	45 mm
RND 205-00020	10	50 mm
RND 205-00021	11	55 mm
RND 205-00022	12	60 mm